


# BUCHBINDERPAPPE

## Extra glatt grau geklebt

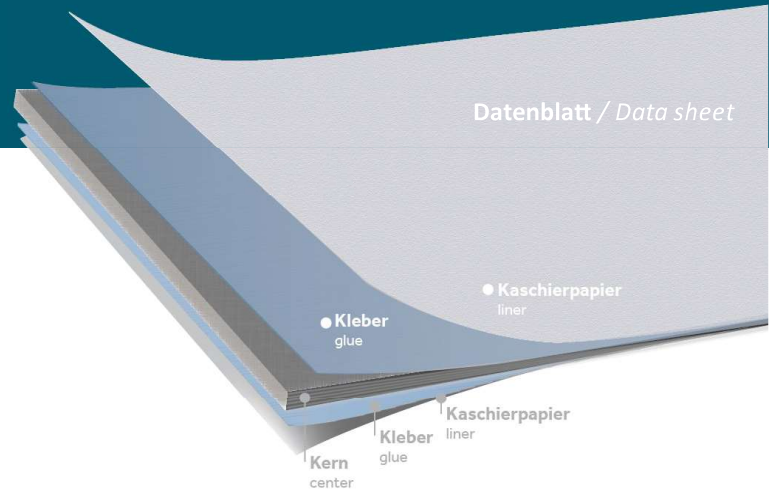

**BB-BOARD 2/S GLAZED**  
**CARTÓN GRIS SATINADO**  
**CARTON GRIS REDOUBLÉ**

### TECHNISCHE WERTE | TECHNICAL FIGURES

DICKE / Thickness (mm)	Flächengewicht Substance (g/m <sup>2</sup> )	Biegesteifigkeit längs Bending Stiffness longitudinal (mNm)	Biegesteifigkeit quer Bending Stiffness transverse (mNm)	Berstdruck Burst pressure (kPa)
1,2	755	510	270	830
1,3	820	730	320	860
1,4	880	850	420	900
1,5	945	970	460	950
1,6	1010	1200	560	970
1,7	1070	1440	840	990
1,8	1135	1880	870	1030
1,9	1195	1910	900	1070
2,0	1260	2040	930	1100
2,1	1325	2320	1080	1150
2,2	1385	2480	1210	1190
2,3	1450	2700	1310	1220
2,4	1510	2970	1400	1270
2,5	1575	3290	1540	1300
2,6	1640	3650	1765	1330
2,7	1700	4020	1820	1350
2,8	1765	4340	1990	1370
2,9	1830	4540	2270	1400
3,0	1890	4660	2310	1500
3,5	2205	7000	3500	1650
4,0	2520	8300	4900	1880

	Einheit / unit of measurement	Wert / value	Toleranzen / tolerances	Testmethode / testing method
Stärke / caliper	mm		+/- 5 %	ISO 534
Format / size	Formate / Zuschnitte cm / mm Large sheets / rotary cut pieces cm / mm		+/- 1,0 mm / +/- 0,25 mm	
Feuchte / humidity	%	8,0	+/- 1,5 %	ISO 287

**PRÜFKLIMA | TESTING CLIMATE 50% RH, 23°**



Änderungen vorbehalten, Stand 08.2020/  
 subject to change, date of issue 2020-08

**SOLID BOARD | ANSPRECHPARTNER | CONTACT**

Smurfit Kappa Wrexen Paper & Board GmbH  
 Orpethaler Str.50 | DE-34474 Diemelstadt  
 Tel: + 49 (0) 564 279-0 | Mail: sales.board.wrexen@smurfitkappa.de